


Light Source - *POWER LED 300*

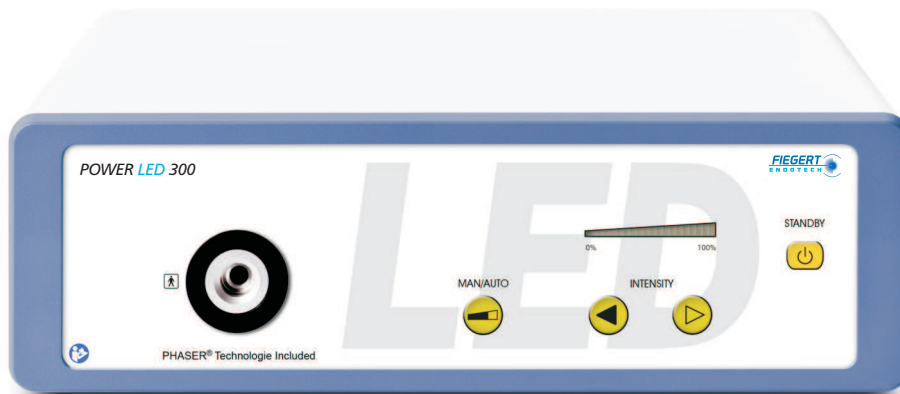

REF.-NO.: 103.0300

Features:

- PHASER® technology
- Low noise, low heat conduction
- Pure daylight quality
- Turret multi connector (optional)

Technical Data:

Lamp	<ul style="list-style-type: none"> · Daylight quality, 6000-6500 K · Lifetime: >10.000 hr
Light guide connection	<ul style="list-style-type: none"> · Storz, (standard connection) · Turret, multi connector Wolf, Storz, Olympus, ACMI (optional)
System	<ul style="list-style-type: none"> · Power supply: 100/240 VAC, 50-60 Hz · Fuses: 2 Fine fuses, 5x20 mm, delay 6,3 AT (I=1500A) · Power consumption: 200 VA
Video In	<ul style="list-style-type: none"> · 1x Video
Standard	<ul style="list-style-type: none"> · Protection class: I · Application part: Type BF · IEC 601-1, EN 60601-1; classification acc. 93/42/EEC: I
Dimensions	<ul style="list-style-type: none"> · (WxHxD): 355 x 120 x 340 mm / · Weight: 10,6 kg